
F-I56C-XX MODEM Specification**Model:**

F-I56C-V1 Conexant Chipset Call ID MODEM

F-I56C-V2 Conexant Chipset support class 2 Fax Call ID MODEM

Product Description:

Conexant chipset ISA Modem,high quality,do good in compatible, no support PNP function.

Product Features:

Hardware structure : ISA MODEM

Caller ID : Support

Standard : ITU-T V.92/V.90/K56Flex,V.34,V.32bis,V.32,V.22bis,V.22,V.23 and V.21;Bell212A and 103

Fax velocity : 14400bps

DTE Data Rate : 115200/57600/38400/19200/14400/9600/4800/2400/1200

FAX mode : ITU-T V.17, V.29, V.27ter and V.21 Channel 2

Data Error Correction : V.42LAPM and MNP2-4

Dial-up : tone,pulse dialing

data bits : 8,9,10,11

stop bits : 1,2bit

parity : odd,even,none

Data Compression : V.42 bis and MNP5

Date Mode : Asynchronous

Telephone Line connection : 2 wire Dial-up

AT Command Set : EIA /TIA 578 class 1

Output Resistance : average 600 \pm 10% ()

Operating system support : DOS,WINDOWS95,WINDOWS98,WINNT4.0,WINDOWS2000


WINDOWS XP,Linux

Terminal interface : ISA interface

System requests : CPU is up 200M MMX;Access 16M RAM;20MB hard disk storage space required

Size : 127mm*99mm

Operation temperature : 32°F to 131°F (0°C to 55°C)

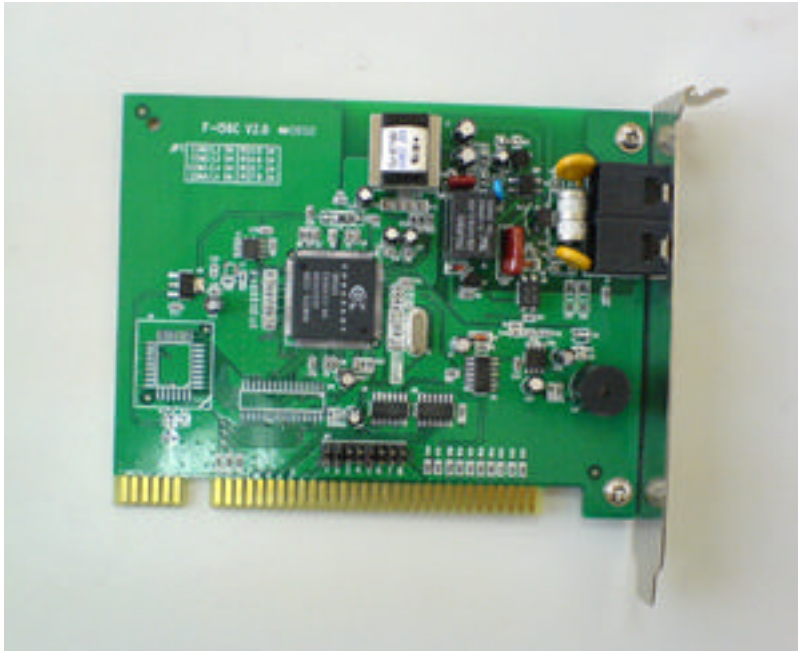

F-I56C-V1